



2.1



Megapixel Universal HD / Analog



STAR-LIGHT™



WDR



Varifocal P-Iris Lens

5 YEAR

Warranty

Summary


STAR-LIGHT™ 2.1MP Universal HD over COAX® cameras deliver crystal clear images and support real-time 30fps HD-Analog, HD-TVI, HD-CVI and all analog signals to 960H. STAR-LIGHT™ Universal HD over COAX® cameras are engineered to work with our VMAX A1™ Universal HD over COAX® DVRs using your existing coax infrastructure for a cost-effective, high resolution surveillance solution.

Features

- Universal HD over Coax® Technology with HD-Analog, HD-TVI, HD-CVI and all Analog to 960H Signal Support
- STAR-LIGHT™ Super Low Light Technology
- 2.1MP 1/3" Image Sensor @ Real-time 30fps
- 2.8-12mm Varifocal P-Iris Lens
- True Wide Dynamic Range (WDR)
- OSD Control Via Coaxial (UTC)
- 100' Smart IR™ with Intelligent Camera Sync.
- Smart DNR™ 3D Digital Noise Reduction
- True Day/Night Mechanical IR Cut Filter
- De-Fog™ Extreme Weather Image Compensation
- Highlight Masking Exposure (HME)
- Easy Icon Driven OSD Menu with Built-in Joystick
- Programmable Privacy Zones
- Auto Gain Control (AGC)
- Backlight Compensation (BLC)
- Dynamic Range Compressor (DRC) Reveals Low Light Detail
- Auto White Balance (AWB)
- UL listed
- NDAA compliant
- 5 Year Warranty

Dimensions

unit: Inch (mm)

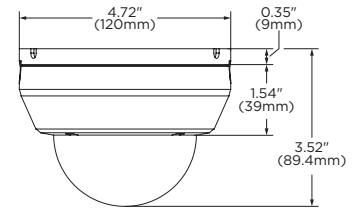

UNIVERSAL HD COAX



Specifications



IMAGE	
Image Sensor	2.1MP 1/3" CMOS Sensor
Active Pixels	1944 (H) x 1092 (V)
Scanning System	Progressive Scan
Frequency	60Hz / 50Hz
Video Output	HD-Analog, HD-TVI, HD-CVI 2.1MP 1080p CVBS Analog up to 960H
Synchronization	Internal
Resolution	1920x1080 (1080p)
Minimum Scene Illumination	F1.4 (30IRE): 0.03 Lux (Color) F1.4 (30IRE): 0 Lux (B/W)
S/N Ratio	55dB
Signal Technology	2.1MP 1080p HD with HD-Analog, HD-TVI, HD-CVI and all Analog to 960H Signal Support
Alarm Output	1 Alarm Output
LENS	
Focal Length	2.8 - 12mm
Lens Type	Varifocal P-Iris Lens
IR Distance	100ft
OPERATIONAL	
Shutter Speed	1/30 - 1/30,000
Backlight	Off / On
STAR-LIGHT™ (Sense-up)	Off, x2 - x32
Wide Dynamic Range (WDR)	Off / On
Wide Dynamic Range dB	100dB
Smart DNR™ 3D Digital Noise Reduction	Off, Low, Middle, High
Wide Dynamic Range dB	100dB
White Balance	Auto / Auto-Ex / Preset / Manual
Day and Night	Day / Night / Auto
Mirror / Flip	Yes
Auto Gain Control	Max 60dB
Motion Detection	Yes
Privacy Zones	16 Privacy Zones
Sharpness	0 - 10
Gamma	0.45 - 0.75
RS485 / UTP Built-in	PELCO D / PELCO C
ENVIRONMENTAL	
Operating Temperature	-4°F - 122°F (-20°C - 50°C)
Operating Humidity	Less than 90% (Non-Condensing)
Other Certifications	UL listed, FCC, CE, ROHS
ELECTRICAL	
Power Requirements	DC12V / AC24V Dual Voltage
Power Consumption	DC12V (LED OFF): 2.94W DC12V (LED ON): 5.22W AC24V (LED OFF): 2.5W AC24V (LED ON): 4.35W
MECHANICAL	
Material	Plastic
Dimensions	4.72 x 3.52 inch (120 x 89.4 mm)
Weight	0.5lbs (226.8 g)



Increase sales and profitability. Sign up and become a DW Channel Partner today!



☎ : 866.446.3595



✉ : sales@digital-watchdog.com



🌐 : www.digital-watchdog.com

